


NEW

# ATS-70


## SAFETY VALVE



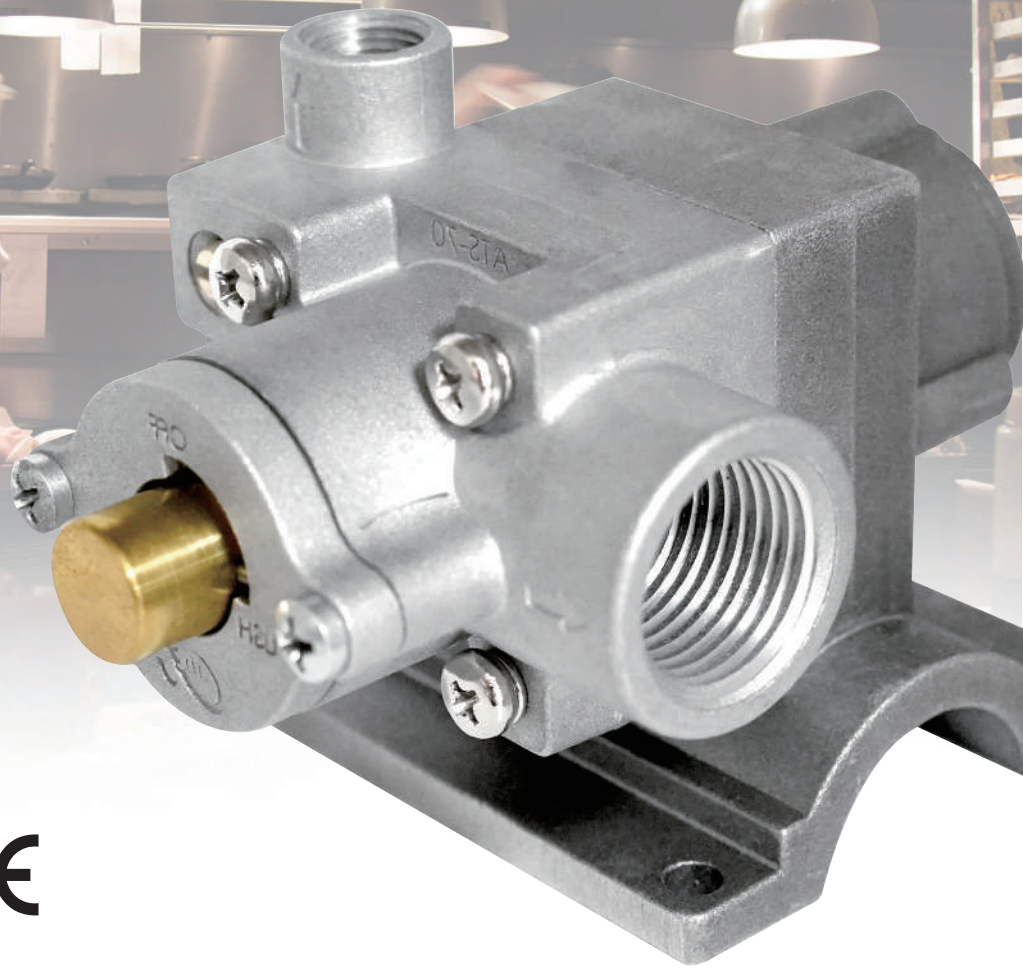

### Compact Size

Save the space of  
cookers's design




### Easy Installation

Saddle mounting way  
for easy installation




### Save Energy

Save energy and  
more safety for usage




### High BTU

To supply gas to more than  
2 pieces of AG thermostats



### Flexible Deploy

Flexible pilot position design  
to fit different structure  
design of cookers











### Application

Griddle / Oven /  
Chinese Wok / Braising Pan

# AN EXPERT FOR COMMERCIAL COOKING APPLIANCES

## COMPARE LIST

			
	ALPHA BRASS		
ITEM	ATS-70	OTHER A	OTHER B
 SIZE	COMPACT SIZE ✓	BIGER SIZE ✗	BIGER SIZE ✗
 MOUNTING TYPE	SADDLE ✓	SCREW ✗	SCREW ✗
 SAVE ENERGY	CAN SHUT OFF PILOT FLAME ✓	NO THIS FUNCTION ✗	NO THIS FUNCTION ✗
 HIGH BTU	200,000 BTU/H ✓	97,000-135,000 BTU/H ✗	200,000 BTU/H ✓
 APPLICATION	GAS SUPPLY INTERNAL / EXTERNAL ✓	GAS SUPPLY INTERNAL / EXTERNAL ✓	GAS SUPPLY INTERNAL ✗


## SPECIFICATION

Inlet Size	Saddle Mount 3/4" Pipe
Outlet Size	1/2" NPT or 3/8" NPT
Pilot Fitting	6mm or 1/4"CC
MAX. Operation Pressure	65mbar or 1/2PSI
Ambient Temperature	0°~125°C (257°F)





# ECONOMICAL WOK SOLUTION

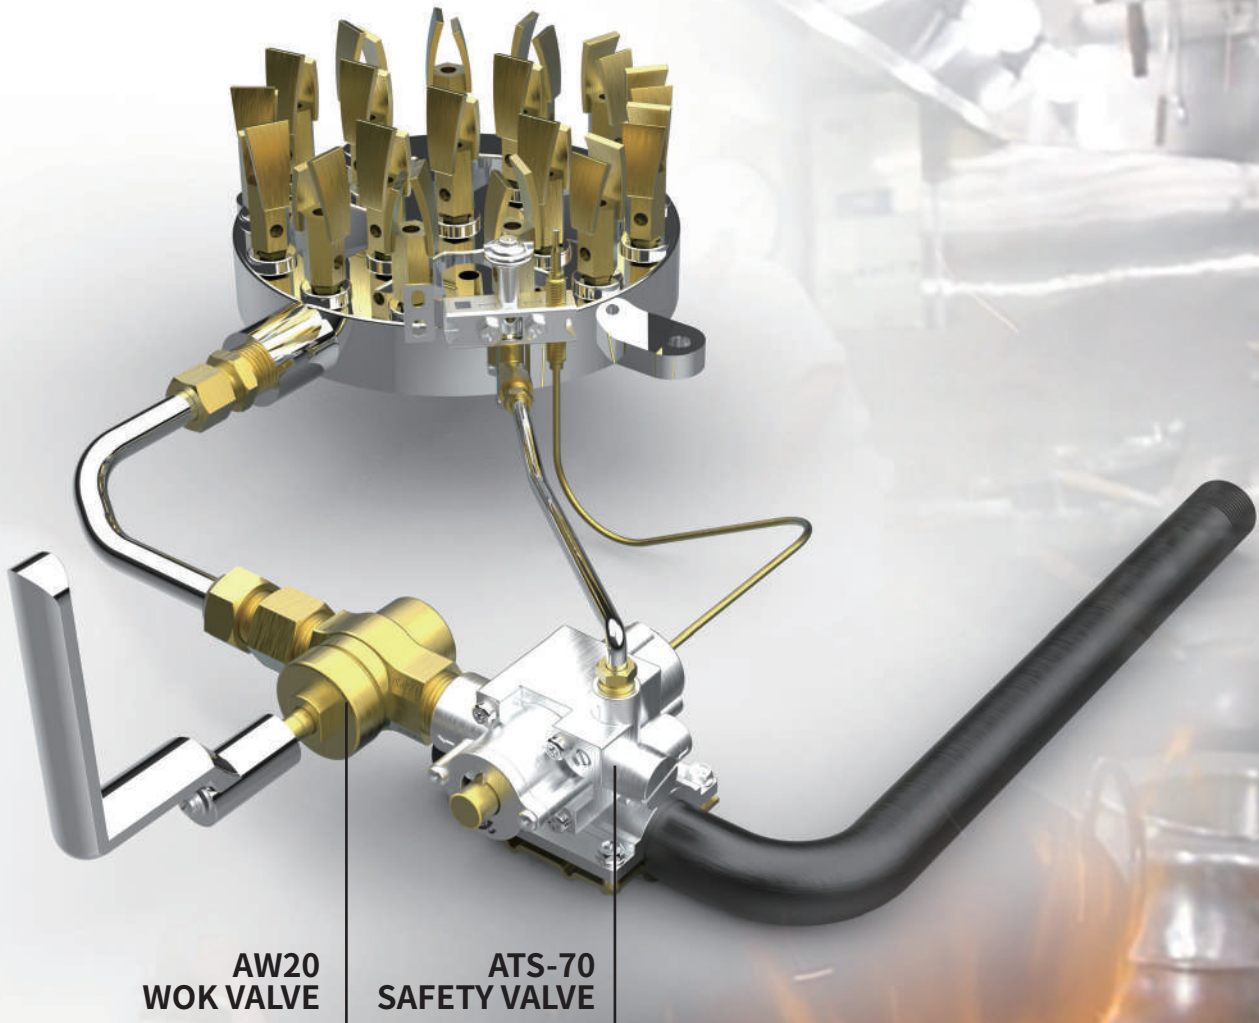

**AW20  
WOK VALVE**

**ATS-70  
SAFETY VALVE**


Suitable for cooking all kinds of Chinese food to match with AW20 wok valve with 240,000 BTU and ATS safety valve.



# VALUE-ADDED GRIDDLE SOLUTION

Accurate temperature control and fast meal delivery


The solution is equipped with AG thermostat to present excellent temperature controlling capability and it is the most common solution type for commercial griddle in US.




**SAVE SPACE**  
Save installation space



**MORE SAFETY**  
Compact size make the flex gas hose away from the cooking top to reduce heat transfer.

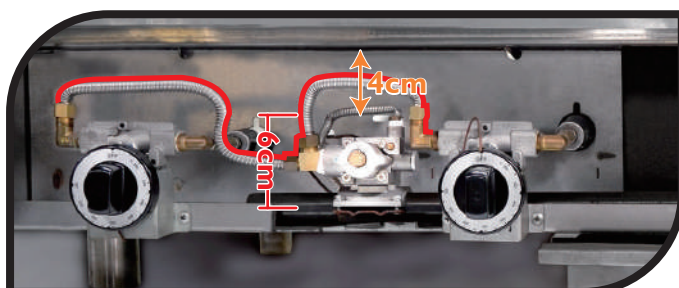

**ATS-70**

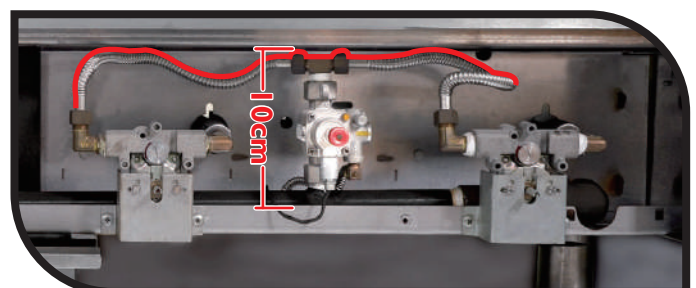


**Other**






# OVEN SOLUTION

Combine with temperature controlled and flameout safety mechanism; it is easy installation and operating.

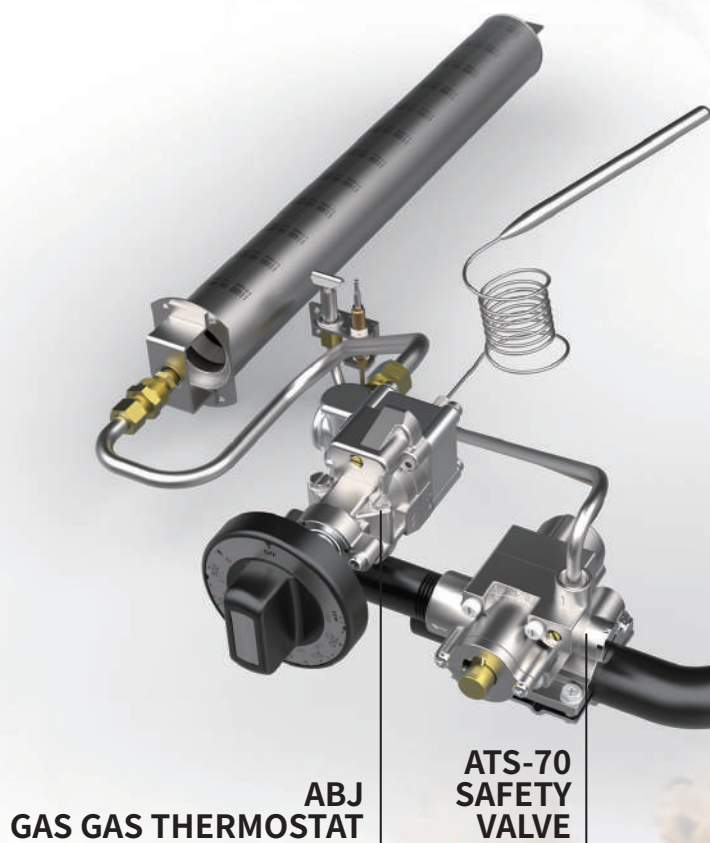

## GAS SUPPLY **INTERNAL**

Maniflod → Safety Valve & Pilot  
→ Thermostat

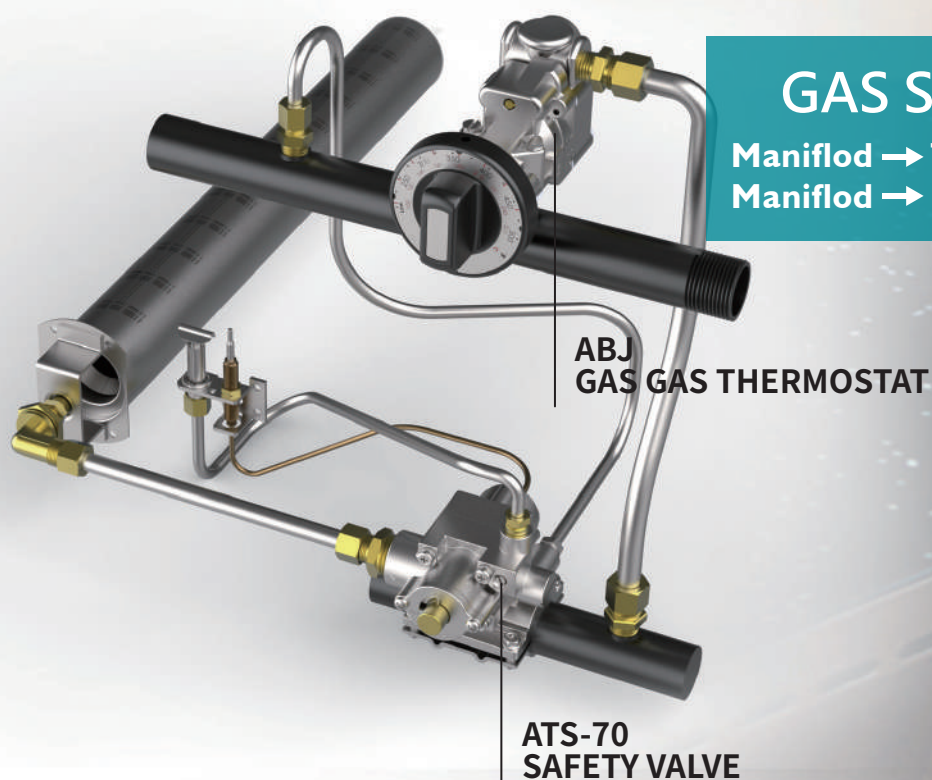

## GAS SUPPLY **EXTERNAL**

Maniflod → Thermostat → Safety Valve  
Maniflod → Pilot



📍 6, Lane 535, Sec 9, Chungching Rd., Chingshui Taichung, 43648, TAIWAN

☎ +886-4-26271407 🖨 +886-4-26265 563

✉ [info@alphabrass.com](mailto:info@alphabrass.com)

